


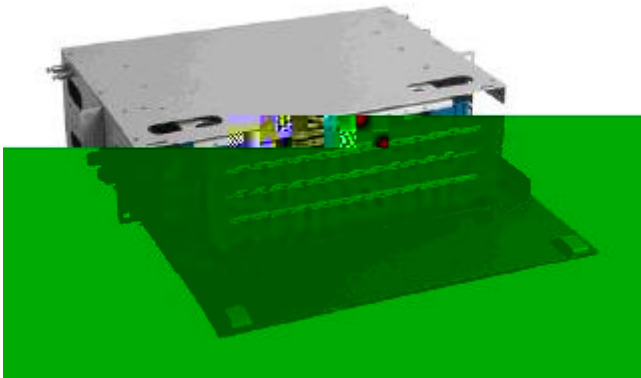

ODF

YD/T778-2011
IEC297-1 IEC297-2
IEC917
GB/T12507-1990

	dB	≤ 0.20		
	dB	≤ 0.50		
	dB	PC	UPC	APC
		≤ -40dB	≤ -50dB	≤ -60dB
		1000		
	—	3000V(DC)/1min		
	—	1000MΩ /500V(DC)		

ODN-□-□-□-□-□-□

FOSC:	FOTB:	FODC:	FOSCA:			
FODF:	FMI:	CAB:	OA:			
IN:	OUT:					
00:	FC	SC	LC	MU/PC	UPC	APC
M:	P:	A:	NA:			
PLCS:	PLCS,OFC:	0	NA:			



FTTH

ABS+PC
IP65

FTTx

YD/T778-2011
IEC297-1 IEC297-2
IEC917
GB/T12507-1990

		12/24/36/48/72/96
	—	/
	—	/
	—	SC/FC
	—	/
	—	/

ODN-☐☐☐☐☐☐☐

FOSC:	FOTB:	FODC:	FOSCA:			
FODF:	FMI:	CAB:	OA:			
IN:	OUT:					
00:	FC	SC	LC	MU/PC	UPC	APC
M:	P:	A:	NA:			
PLCS:	PLCS,OFC:	0	NA:			



FTTH


8-48
SC FC LC

FTTx

YD/T778-2011
IEC297-1 IEC297-2
IEC917
GB/T12507-1990

		8-48
	—	
	—	SC/FC/LC
	—	19
		-25~+55
	%	≤ 85
	—	20000MΩ/500VDC

		15KDC/1min
--	--	------------

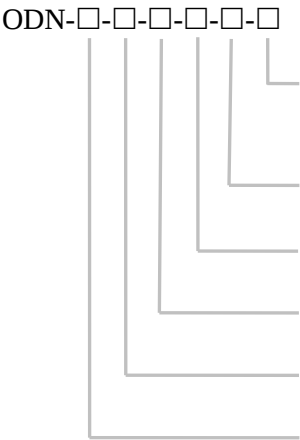

FOSC:	FOTB:	FODC:	FOSCA:			
FODE:	FMI:	CAB:	OA:			
IN:	OUT:					
00:	FC	SC	LC	MU/PC	UPC	APC
M:	P:	A:	NA:			
PLCS:	PLCS,OFC:	0	NA:			