/

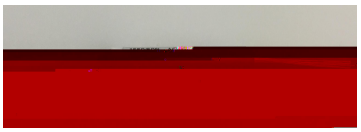

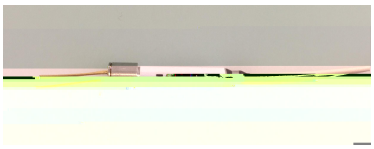

/

Mini

Telcordia GR-468-CORE RoHS

DWDM

VMUX

Telcordia GR-468-CORE
RoHS

		Common			Mini		
	nm	1510~1610			1260~1360&1510~1610		
		1:99	5:95	10:90	1:99	5:95	10:90
[1]	dB	≤0.6	≤0.7	≤1.0	≤0.6	≤0.7	≤1.0
	dB	≤0.3					
	dB	≤0.1					
	dB	≥45					

PD		μA/mW	≥7	≥40	≥70	≥7	≥40	≥70	PIN respond to the input port
		nA	<1						@-5v Vr,25
		pf	≤1.5			≤10			f=1MHz;Vr=5V
		MHz	>1000			>300			RL=50,5v,-3dB
		dBm	24	17	14	24	17	14	
		V	15						
		mA	10						
		mm	Φ5.5*28			Φ3.0*22			
			75*60*12(-1) 75*60*15(-2) 53*40*10(2/4/5)			33*31*6(8)			

TAPD-□-□-□-□-□-□-□-□

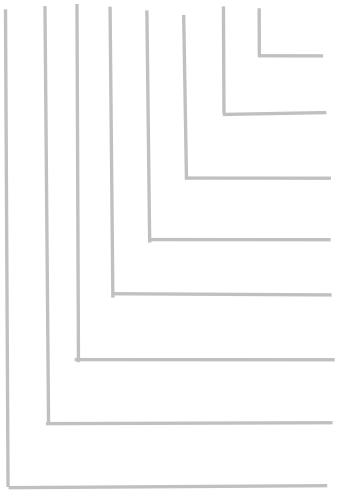

Pin Type 00: unbent 01 bent

Bracket Style C: Φ5.5*28 M:Φ3.0*22

Connector FC,SC,LC,MU/UPC,APC

Fiber Length 1:1.0m customer specify

Fiber Dia 09: Φ0.9mm 025: Φ0.25mm

Fiber Type S: single mode fiber H: G.655 single mode fiber

Tap Ratio: 01:1/99 05:5/95 10:10/90

Wavelength: 1550:1510~1610nm 135:1310&1550nm

OPDM-□-□-□-□-□-□-□-□

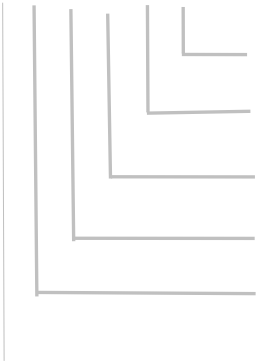

Connector 00: no connector FC SC LC/UPC APC

Fiber Length 00:adapter 1:1.0m customer specify

Fiber Dia 09: Φ0.9mm 025: Φ0.25mm

Fiber Type S: single mode fiber H: G.655 single mode fiber

Tap Ratio: 01:1/99 05:5/95 10:10/90

Wavelength: 1550:1510~1610nm 135:1310&1550nm

Channel Number: 1:Single channel 4:4 channels 8:8 channels

Type: C:Common type M:Mini type