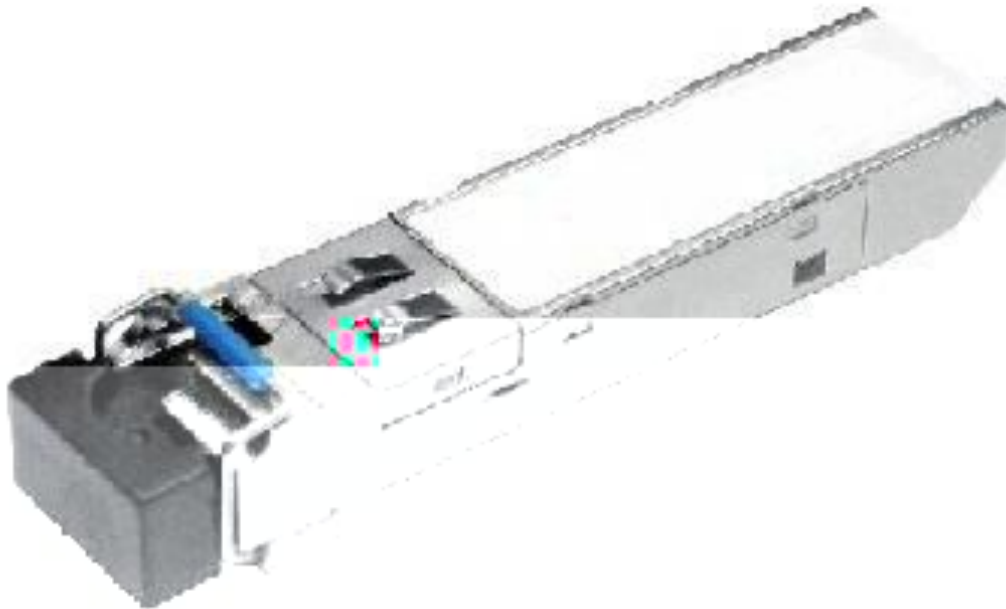


RTXM182-801

RTXM182-802

155Mb/s

LC

SFP

PIN

EEPROM

-

- LC
- 3.3V
- 155Mb/s
- PECL
-
- 40
- : 0°C ~+70°C
- RoHS

-
-
-

- SFP MSA (INF-8074i)
- IEEE802.3ah
- ITU-T G.957

参数	符号	单位	最小	典型	最大	备注
	Icc	mA	-	-	300	1
		mV	150	-	1100	
		mV	300	-	600	
TX_fault /LOS	VOH	V	2.0	-	Vcc	(TTL)
	VOL		0	-	0.8	
Tx_disable	VOH	V	2.0	-	Vcc	(TTL)
	VOL		0	-	0.8	
155M-BIDI SFP						
Po		dBm	-5			

备注 1.
备注 2. 155Mbps 23

型号	规格								应用
RTXM182-801	SFP	155M	1310nm FP-LD	-5~0 dBm	PIN 1550nm	< -31dBm	0~70°C	40km	STM1 FE
RTXM182-802	SFP	155M	1550nm DFB-LD	-5~0 dBm	PIN 1310nm	< -31dBm	0~70°C	40km	STM1 FE

